

24V PoE Injector

WI-POE31-24V | WI-POE51-24V



Overview

Wi-Tek 24V injector provides 100Mbps or 1000Mbps ports and supports 24V Passive PoE output. Wi-Tek Power over Ethernet injectors provides different power and high-speed Ethernet data connection anywhere in your network. It can provide power to devices far away from sockets.

Features

Save your Cable and Time

Your CPE and 24V Passive PoE equipment will no longer be restricted by locations without power sockets and power sockets, additional AC wiring. Most of all, it reduces installation time.

Plug and Play, No Configuration Required

A plug-and-play design allows administrators to quickly connect the injector to the device with no hassle and no action required

Easy to Install

Zero configuration, simply connect the injectors to an Ethernet Switch and to the IP-based PoE device to provide power and data for the network with a compact and lightweight design.




Specifications

Model		WI-POE31-24V	WI-POE51-24V
Hardware Specifications			
Hardware Version		V1	V1
Interfaces			
Interfaces		1 10Mbps/100Mbps RJ45 LAN port 1 10Mbps/100Mbps PoE port	1 100Mbps/1000Mbps RJ45 LAN port 1 100Mbps/1000Mbps PoE port
PoE			
PoE Output Power		Passive PoE 24V 1A max	
Power Supply			
Input Power		AC 100 ~ 240V 50/60Hz 0.3A Max	
Physical Characteristics			
LED Indicators		power On: the device power on is normal Off: the device is power off or failed	
Fan Quantity		Fanless	
Injector Dimension		114*48*30 mm	
Package Dimension		200*132*42 mm	
Weight		Net Weight: 0.11 kg	
		Package Weight: 0.26 kg	
Installation		Desktop	
Environmental			
Reliability	Surge Immunity	IEC 61000-4-5 Common mode 3kV Differential mode 2kV	
	ESD Protection	IEC 61000-4-2 Contact discharge 6kV Air discharge 8kV	
Operating Temperature		-10°C to 55°C(14°F to 131°F)	


Operating Humidity	5% ~ 90% RH no condensation
Storage Temperature	−40℃ to 75℃(−40°F to 167°F)
Storage Humidity	5%~95% RH no condensation
Others	
Certification	CE, FCC, RoHS, UKCA, RCM

WI-POE31-24V

Dimensions (mm)

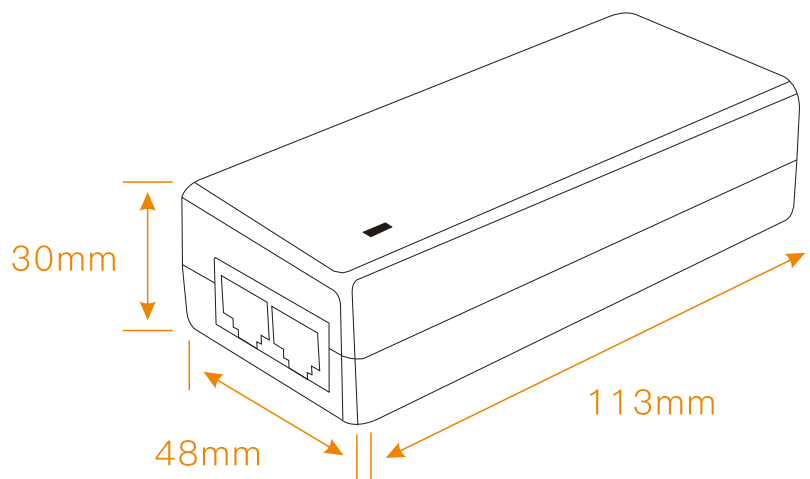


Front Panel



AC IN 100-240V


Side Panel




1*10/100Mbps Ethernet Port
1*10/100Mbps PoE RJ45 Port

WI-POE51-24V


Dimensions (mm)

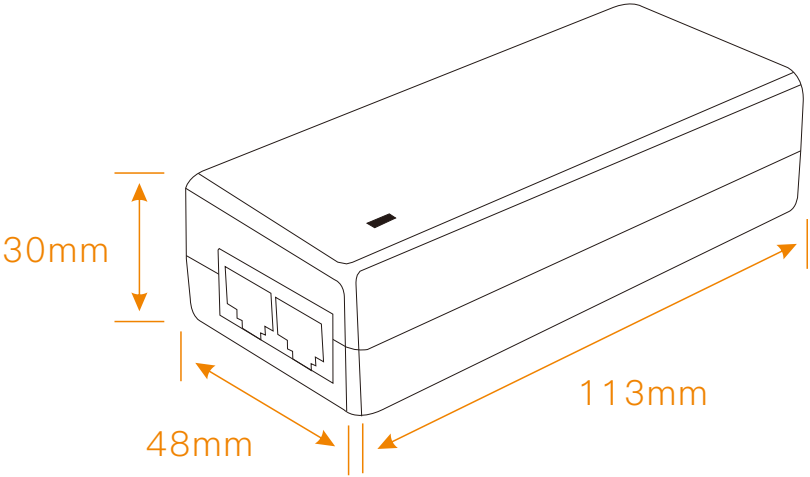

Front Panel



Side Panel

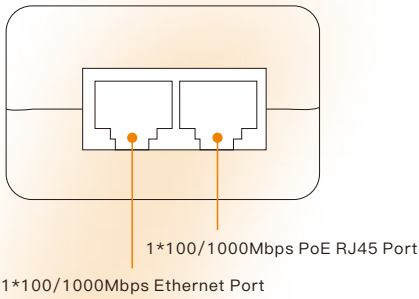

Package Contents

Welcome to order our products. After purchasing, you will receive:

Items	Quantity
PoE Injector	1 pcs
Power cord	1 pcs
Quick Installation Guide	1 pcs



Wireless–Tek Technology Limited
 Address:Building 3, Units 1801–1807, 1812,
 Huaqiang Era Plaza, Tangwei Community,
 Fuhai Street, Bao’an District, Shenzhen City,
 Guangdong Province, China.
 Website:www.wireless–tek.com
 Tel:86–0755–32811290
 Email:sales@wireless–tek.com
 Technical Support:tech@wireless–tek.com



Technical Support



Cloud Management



Company Website